







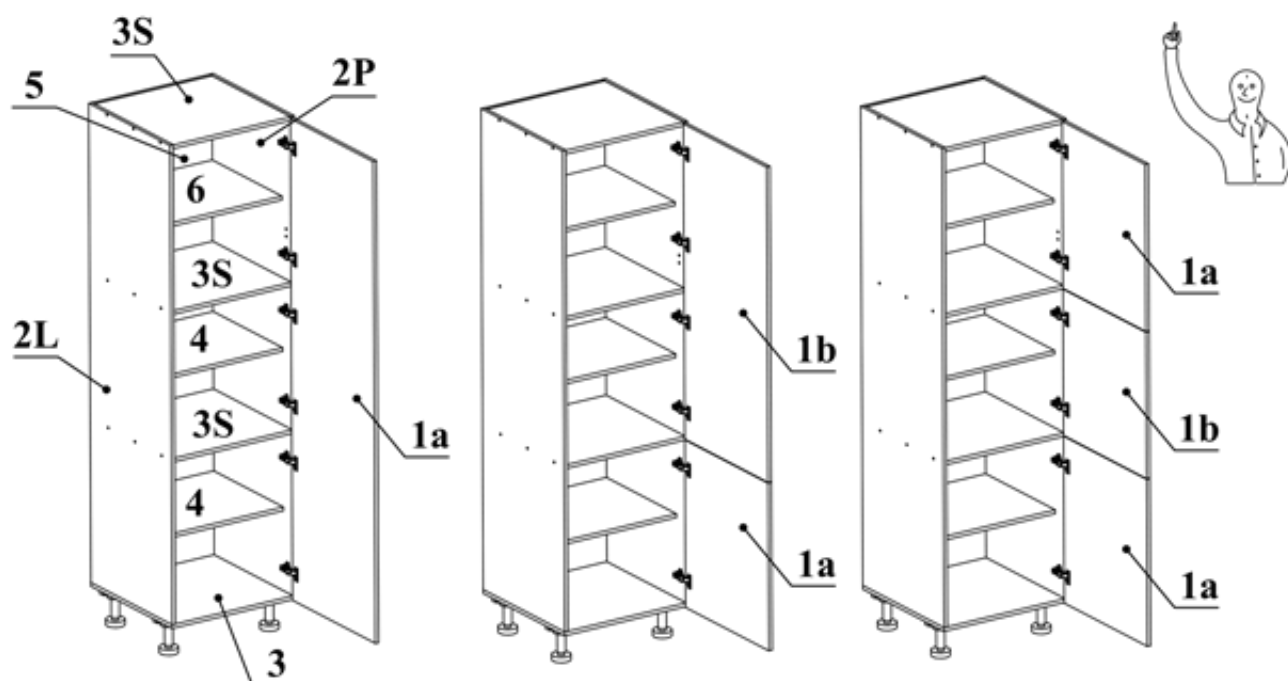

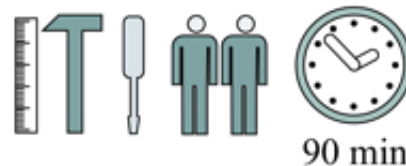



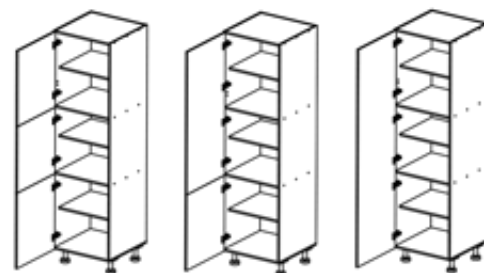





Assembly Instructions for cabinets: EURO S40/222,S60/222






Check all the items are in your box according to the list on this manual. If you are missing anything, please check all other boxes first and then send us an email with a list of the parts you need. Follow the instructions for one, two or three doors depending on which you have.





90 min

A1 X30  ø8x36	B4 X26 	B5 X26  ø15x12	G5 X26 	Z2 X28  ø5	G7 X12 
E7 X6 	E8 X6 	B11 X6  Ø7x50	G4 X6 	D10 X12  USØ3,5x13	G2 X1 
D27 X16  USØ4x35	I15 X4  L=150 mm	I16 X6 	D30 X12  USØ3,5x16	G3 X6  ø35	



EURO S40/222,S60/222

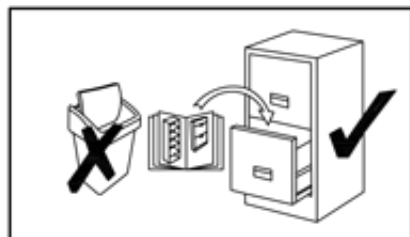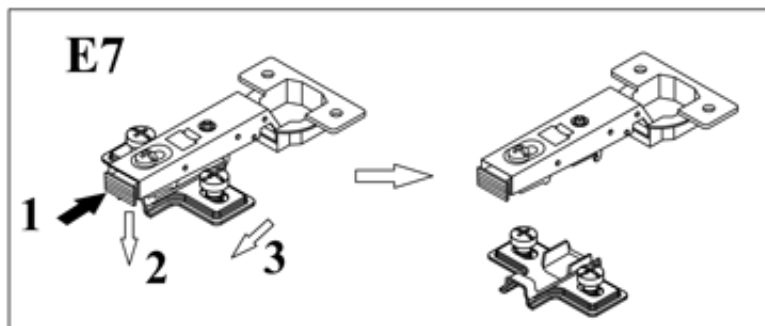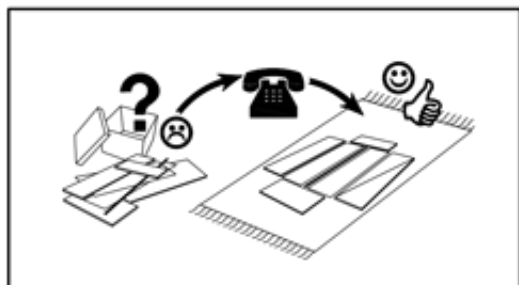



Keep your product assembly manual in a safe place until your kitchen is finished.

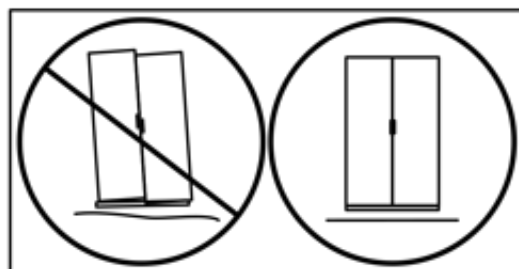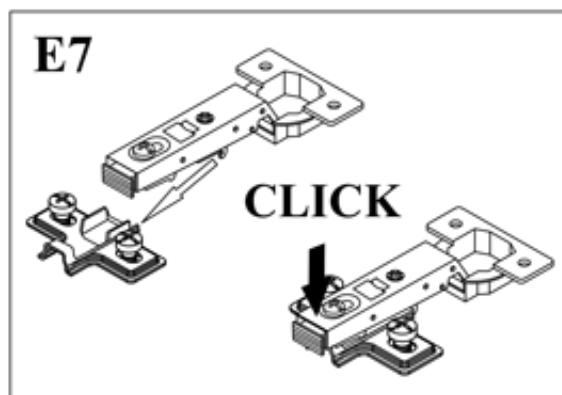

Be sure to assemble your cabinets on a flat surface and keep them straight and square.

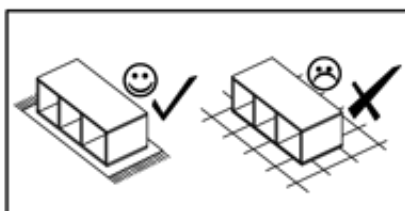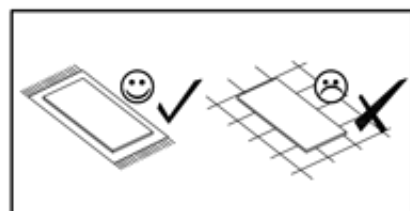

Assemble your cabinets on a rug or a surface that will not scratch or damage them.




Do not push cabinets into place. Get someone to help you lift the cabinets into place, or you could risk damaging the feet.
Do not stand on the cabinets.




Once protective film on thermal wrap doors is removed, do not clean for 7 days. This allows the surface to harden. Only clean the cabinets with a small amount of warm water or non harsh chemicals.

EURO S40/222,S60/222

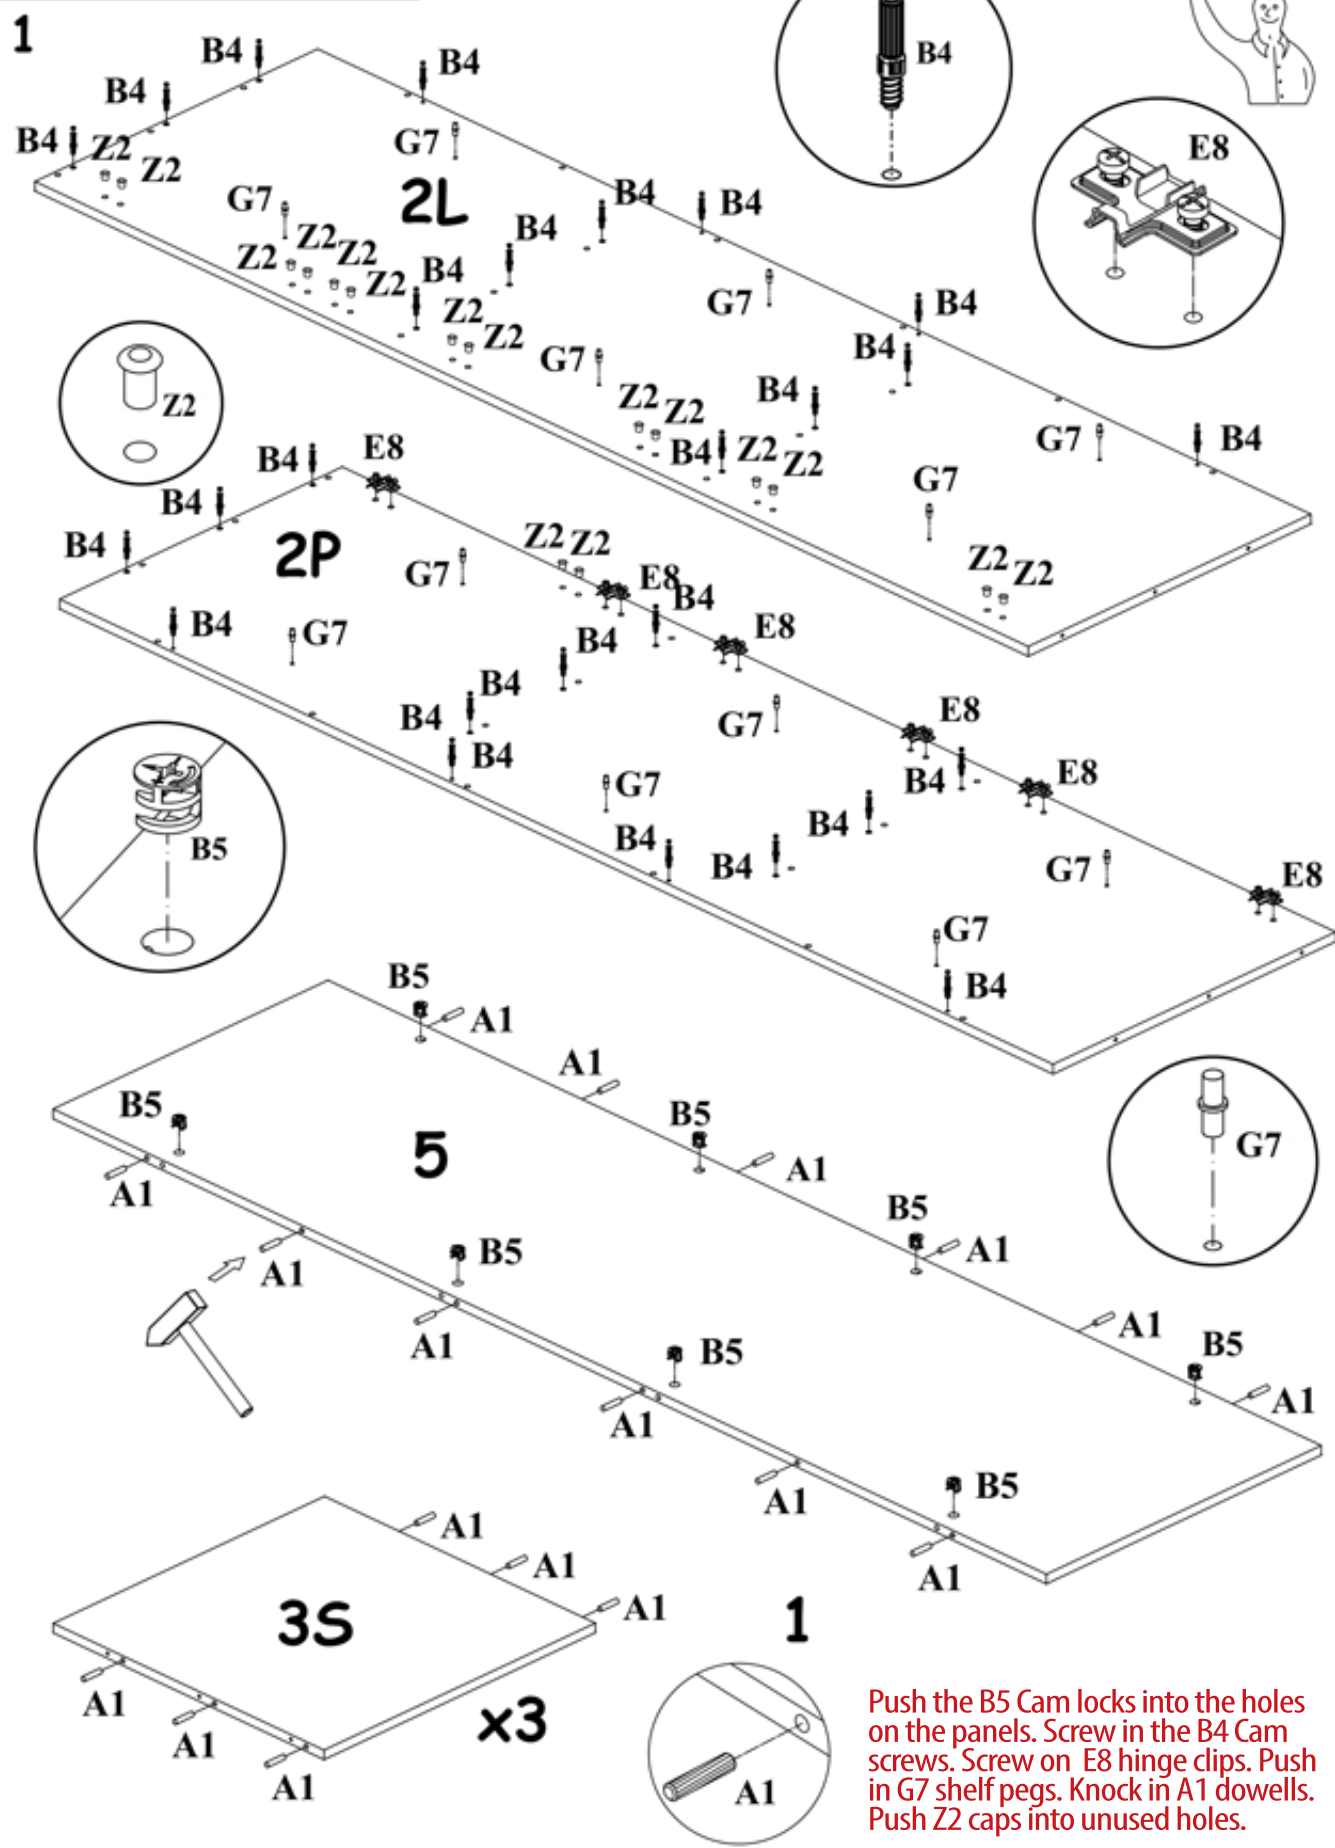



EURO S40/222,S60/222

2

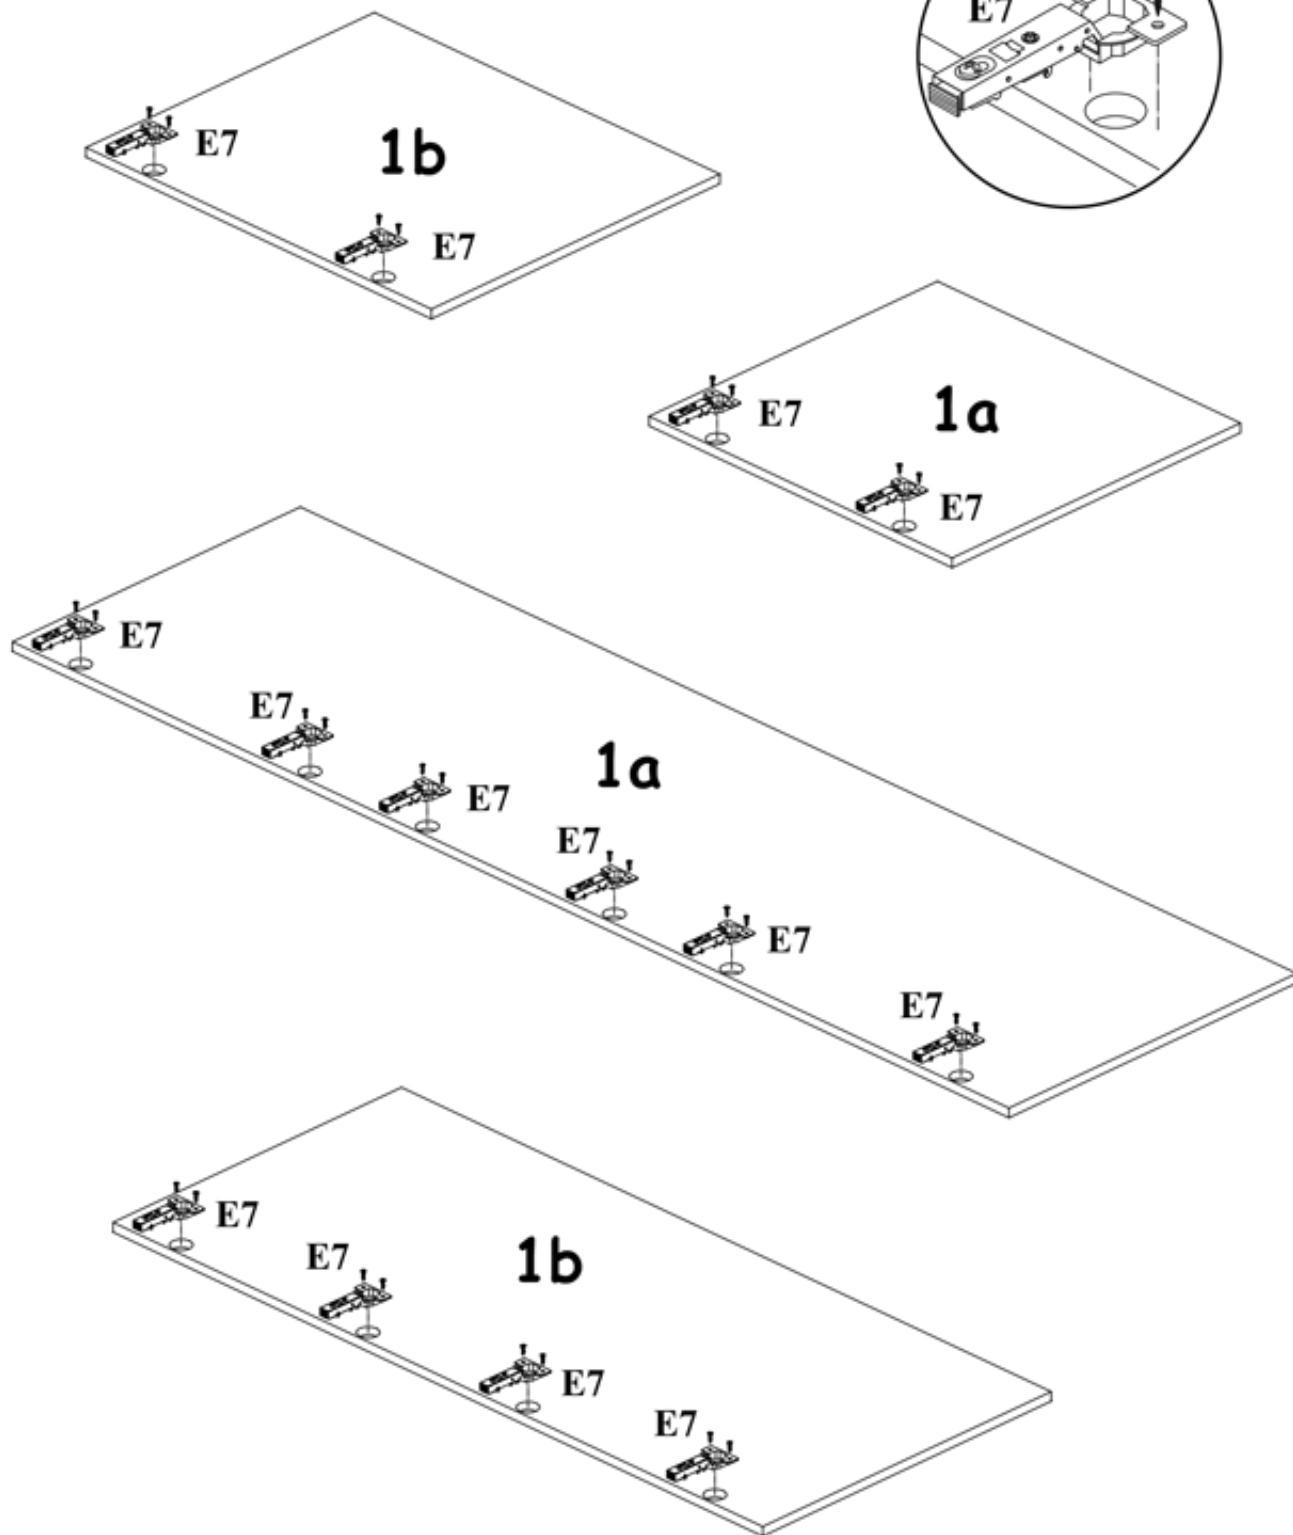



Push in and screw in place the E7 hinges to the inside face of the door(s). Use D10 screws. Make sure the hinge arms are straight at a right angle to the edge of the door.

EURO S40/222,S60/222

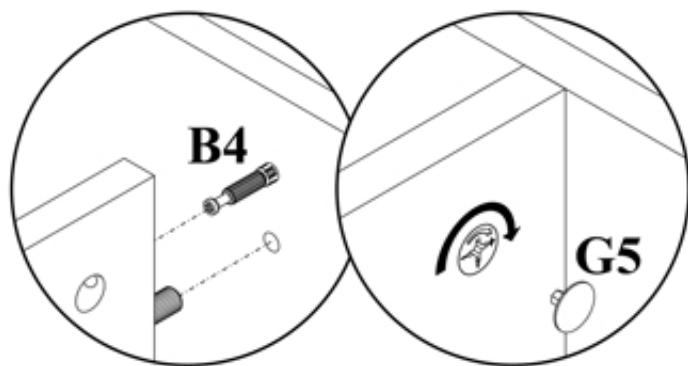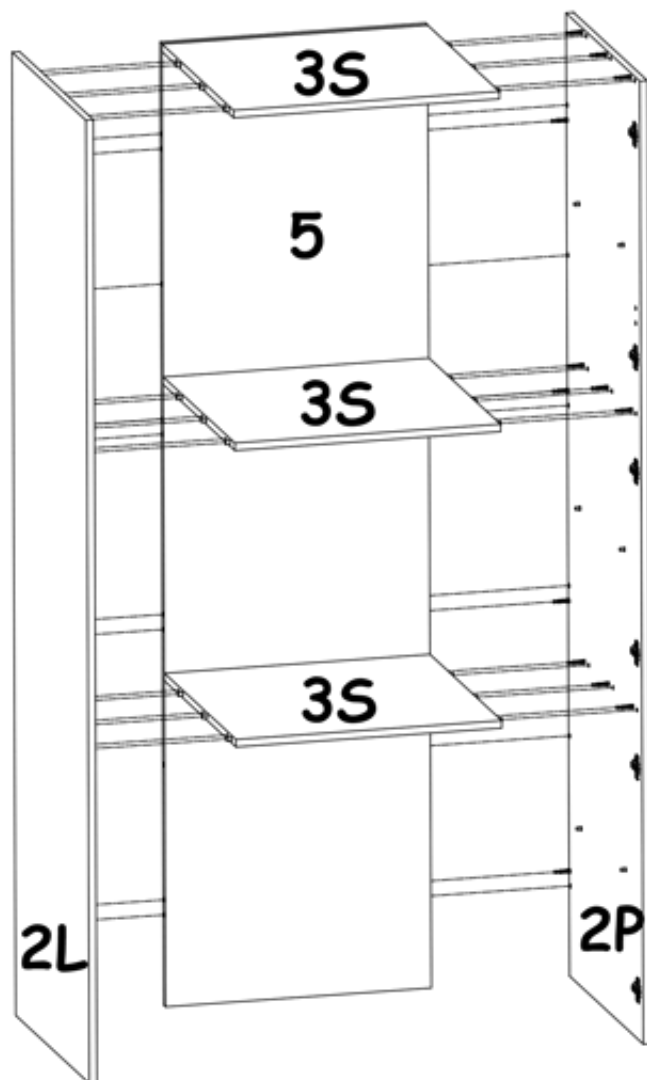3

Push the panels together so that the B4 cam screws slide into the holes in line with the B5 cam locks. Start with one side panel, the backpanel and the top panel. Now attach the 3S shelves, then the other side panel. Tighten the B5 cam locks, then push on G5 caps.



Now screw on the base panel with the B11 screws and allen key tool. Push G4 caps over the screws.

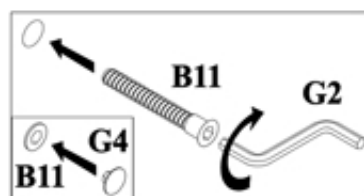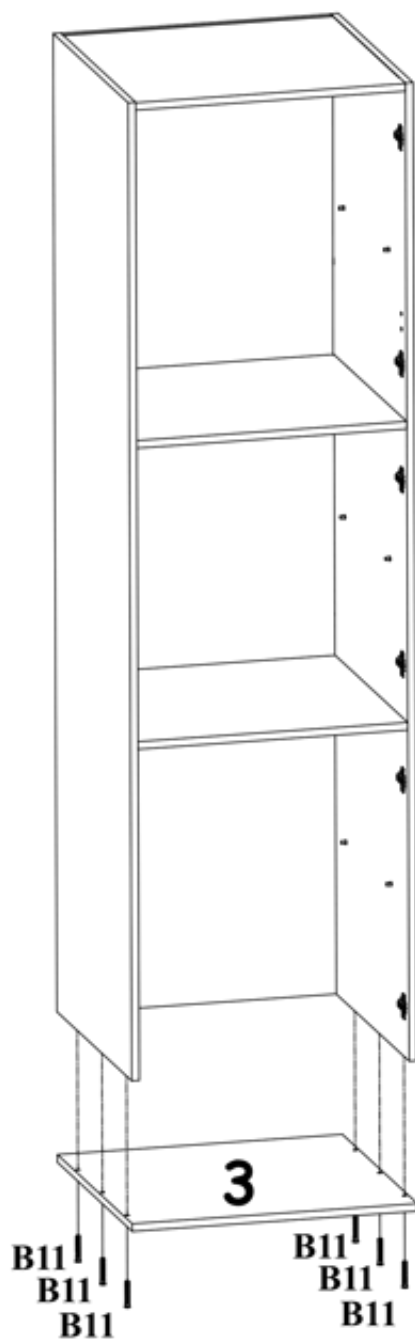4


EURO S40/222,S60/222

5

Carefully lay the cabinet down on a non-scratch surface. Screw on the feet with D27 screws.





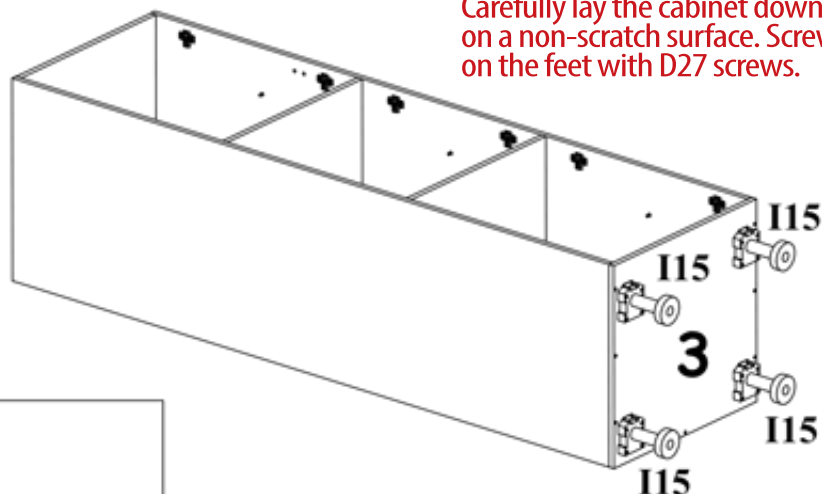
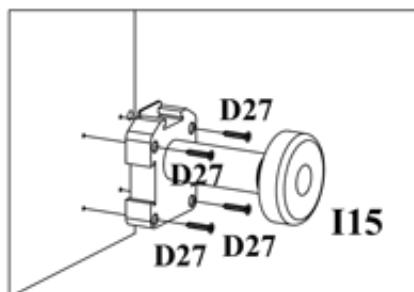


6

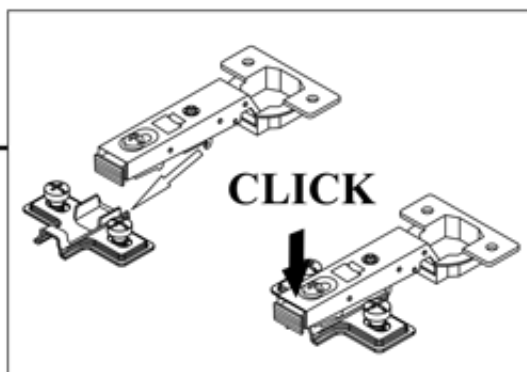


Attach the doors by sliding the hinges over the hinge clips, pushing down until they click into place.

Use a phillips head screwdriver to adjust the tilt and rotation of the doors to make them level.

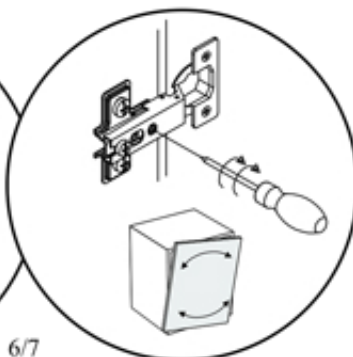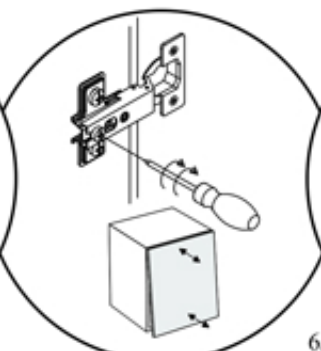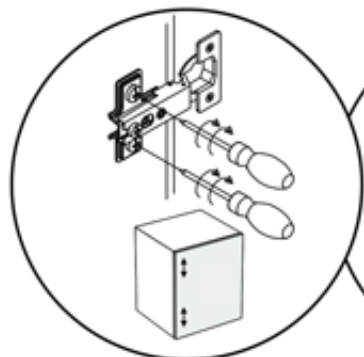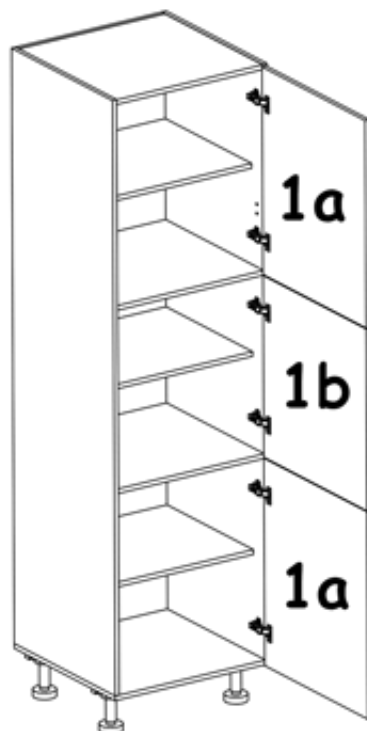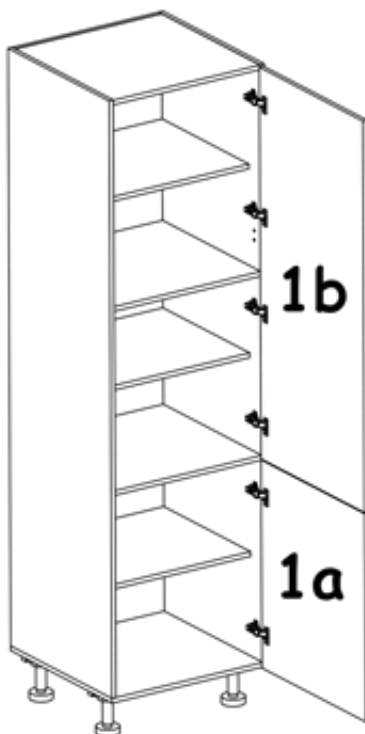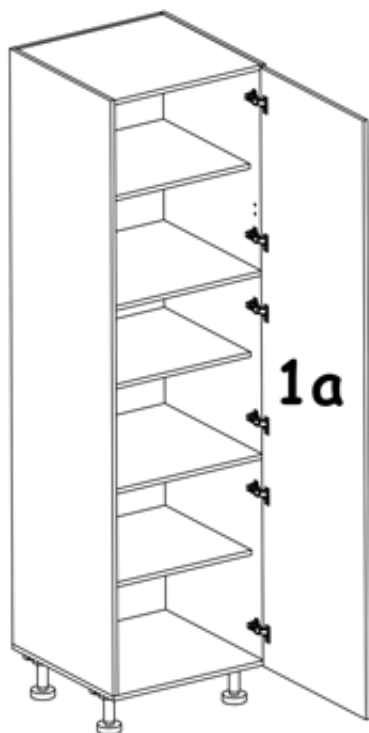


EURO S40/222,S60/222




7

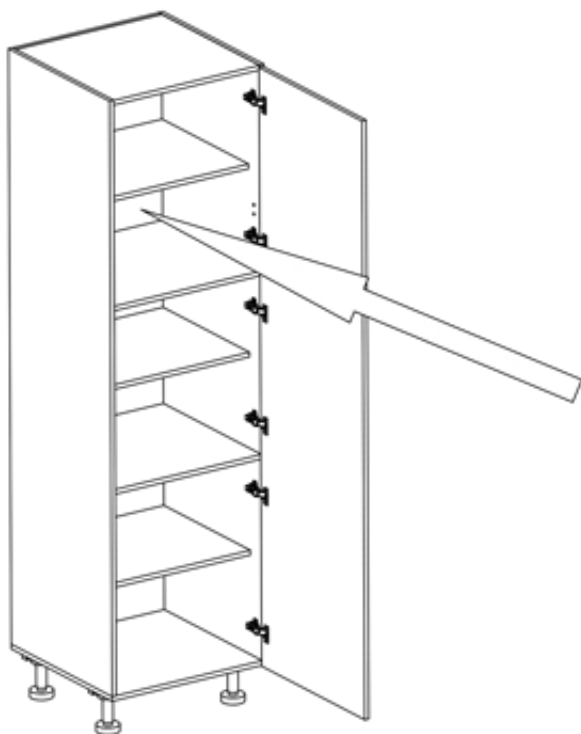

Visit your local hardware store to confirm and purchase the correct type of wall fixings to suit your wall type.
Now you can predrill and screw your cabinet to the wall through the back panel.

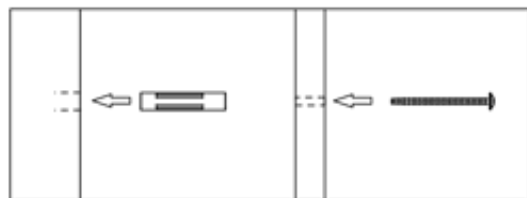

8

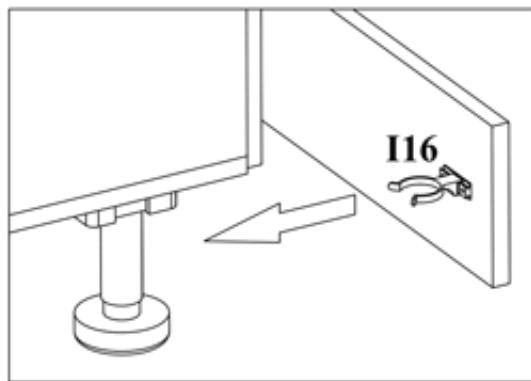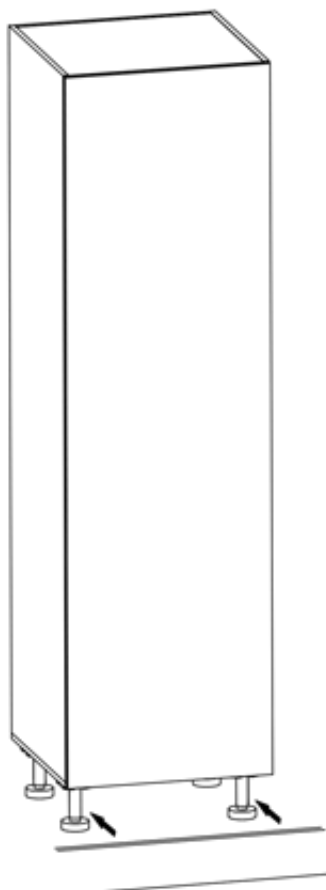

Follow instructions from our website for fitting toe kicks if you have purchased them.

Screw on the toe kick clip brackets I16 to line up with the cabinet feet and slide the clips on.

